


EURO PLASTIK

To All World

**PVC CABLE TRUNKING
TECHNICAL DATA SHEET**

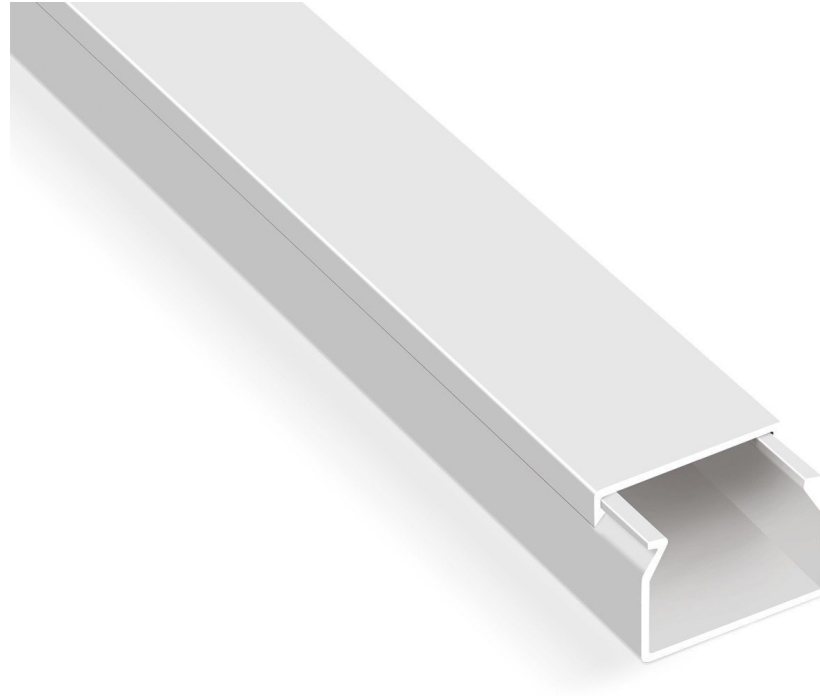


Raw Material	PVC UL94, V0 M1
Impact Resistance	0,5 Joule
Operation Temperature	-25 65 C°
Colour	White RAL 9010
IP Ingress Protection	IP40
Type	2 Cable Trunking Systems



ITEM NAME	LENGHT/mt	INNER QTY/mt	VOLUME m3	WEIGHT OF BOX/KG
PVC Trunking (carton box) 12 x 12	2MT	270	0,05454	14,9
PVC Trunking (carton box) 15 x 10	2MT	264	0,05454	15,8
PVC Trunking (carton box) 16 x 16	2MT	240	0,08181	18,2
PVC Trunking (carton box) 20 x 10	2MT	216	0,05996	17,7
PVC Trunking (carton box) 25 x 16	2MT	160	0,08181	18,9
PVC Trunking (carton box) 25 x 25	2MT	100	0,08181	15
PVC Trunking (carton box) 30 x 20	2MT	100	0,07611	15
PVC Trunking (carton box) 40 x 16	2MT	100	0,08181	17,8
PVC Trunking (carton box) 40 x 25	2MT	80	0,10908	17,2
PVC Trunking (carton box) 40 x 40	2MT	80	0,10908	22
PVC Trunking (carton box) 60 x 40	2MT	40	0,10908	15,8
PVC Trunking (carton box) 60 x 60	2MT	32	0,10908	16,4
PVC Trunking (carton box) 80 x 40	2MT	36	0,10908	18,7
PVC Trunking (carton box) 80 x 60	2MT	30	0,10908	19,5
PVC Trunking (carton box) 100 x 40	2MT	24	0,10908	16,9
PVC Trunking (carton box) 100 x 60	2MT	16	0,10908	13,8
PVC Trunking (carton box) 120 x 60	2MT	16	0,07474	16,4





UV Resistance



Liquid Resistance



Non-Conductive



Non-Flammable



Paintable



Adaptable



Easy Installation

